

Tow Ring Draw Bars

Primarily used on equipment and utility trailers, the single point mounting design eliminates the need for a swivel type pintle hook in demanding off-road situations.



Part No.	Ref. No.	Brand	Eye Diameter	GTW lbs.	Shank Dimension
1250-3	307800	Holland	2 1/2"	15,000	1 1/2" O.D. x 3 1/4"L
050A	307801	Wallace	2 1/2"	20,000	1 1/2" O.D. x 3 1/4"L
1249-2H	308000	Holland	3"	45,000	2" O.D. x 4 1/2"L
051B	308001	Wallace	3"	50,000	2" O.D. x 3 3/4"L



Flat Draw Bars

The Flat Bar design allows the following Draw Bars to easily bolt to the trailer tongue (#LW10 welds to trailer tongue). For all types of trailer applications.

Part No.	Ref. No.	Brand	Eye Diameter	GTW lbs.	Shank Dimensions
LW10	308300	Wallace	2 1/2"	10,000	2 1/2" wide, 2" long
1228-1	308800	Holland	2 7/16"	20,000	7 Bolt, 3" x 14 1/4"
043D	308801	Wallace	2 1/2"	20,000	7 Bolt, 3" x 14 1/4"
1238	309000	Holland	3"	22,000	7 Bolt, 3" x 13 5/8"
052D	309001	Wallace	3"	22,000	7 Bolt, 3" x 14 5/8"



JACKS,
COUPLERS &
WINCHES

Atwood A-Frame Jacks



For mounting on A-Frame Couplers, the following Atwood jacks come with or without a mounting bracket, for bolt-on or weld-on applications. See page F-19 for Atwood casters and feet.

Part No.	Ref. No.	Capacity	Lift	Bracket Height	Retracted Height	Type of Wind
80036	272200	1,000 LBS	12"	NO BRACKET	19"	TOP
80009	272800	1,000 LBS	15"	7.75"	22"	TOP
80000	273000	1,000 LBS	14"	7.75"	24.25"	SIDE
80401	273200	2,000 LBS	14"	8.75"	22"	TOP
87510	273400	2,000 LBS	14"	7.75"	24.25"	SIDE
80380	273600	5,000 LBS	14"	NO BRACKET	21.75"	TOP
80391	273800	5,000 LBS	14"	11.25	22"	TOP

BULLDOG® A-Frame Jacks



155022

For mounting on A-Frame Couplers, the following BULLDOG® jacks come with a mounting bracket for bolt-on or weld-on applications. The #155033CW comes with a removable steel wheel.

Part No.	Ref. No.	Capacity	Lift	Bracket	Retracted Height	Type of Wind
155022	282625	2,000 LBS	15"	8.5"	24.25"	TOP
0155033	282630	2,000 LBS	15"	5.5"	23.25"	TOP
155033CW	282635	1,000 LBS	15"	12.50"	30.50"	TOP
155100	282700	2,000 LBS	15"	7.5"	28.25"	TOP
155102	282620	2,000 LBS	14"	8"	20"	TOP
175020	284800	5,000 LBS	15"	10.7"	26.45"	TOP

Shelby A-Frame Jacks



For mounting on A-Frame Couplers, these Shelby jacks come with a mounting bracket for bolt-on or weld-on applications. The outer tube is painted black, and the inner tube is zinc plated. See part #5702 caster and #5703 foot on page F-19.

Part No.	Ref. No.	Capacity	Lift	Bracket	Retracted Height	Type of Wind
5718	263101	2,000 LBS	14"	7"	19"	TOP
5719	263104	5,000 LBS	14"	7"	19"	TOP

JACKS,
COUPLERS &
WINCHES

Atwood Pipe Mount Swivel Jacks



For industrial and agricultural applications. Atwood Pipe Mount Swivel Jacks are engineered for the most demanding situations, giving superior side-load stability over snap ring jacks. **The inner Weld-on Pipe Swivel Bracket that attaches to the trailer is sold separately on page F-19.**

Part No.	Ref. No.	Capacity	Lift	Bracket Height	Retracted Height	Type of Wind
80459	271000	2,000 LBS	10"	10.4"	14.2"	TOP
82332	271200	2,000 LBS	10"	10.7"	15.5"	SIDE
81264	271400	2,000 LBS	15"	7.8"	22.1"	TOP
82471	271600	5,000 LBS	15"	10.6"	25.1"	TOP

Shelby Pipe Mount Swivel Jacks



Shelby's square tube pipe mount swivel jacks are plated with an alkaline-based Zinc that doubles as a primer coat. Includes the inner weld-on pipe swivel bracket.

Part No.	Ref. No.	Capacity	Lift	Bracket Height	Retracted Height	Type of Wind	Mount Style
6101GS	263120	3,500 LBS	15"	15.5"	24.25"	SIDE	ROUND
6101QS	263125	3,500 LBS	15"	15.5"	24.25"	SIDE	SQUARE
6105GT	263135	5,000 LBS	15"	15.5"	21.25"	TOP	ROUND
6105QT	263130	5,000 LBS	15"	15.5"	21.25"	TOP	SQUARE

BULLDOG® Pipe Mount Swivel Jacks

For industrial and agricultural applications, the following BULLDOG® Pipe Mount Jacks come complete with the inner weld-on pipe swivel bracket that attaches to the trailer. Painted outer tube, zinc plated inner tube. Part numbers 195362 and 195312 have a square mount.



Part No.	Ref. No.	Capacity	Lift	Bracket Height	Retracted Height	Type of Wind
158451	282800	2,000 LBS	10"	11.25"	18.5"	TOP
158109	283000	2,000 LBS	10"	11.25"	17"	SIDE
158452	283200	2,000 LBS	15"	14.5"	27.75"	TOP
158151	283400	2,000 LBS	15"	14.5"	26.5"	SIDE
178101	284000	5,000 LBS	10"	11.25"	18.5"	TOP
178201	284200	5,000 LBS	10"	10"	17.5"	SIDE
178151	284400	5,000 LBS	15"	14.5"	27.75"	TOP
178203	284600	5,000 LBS	15"	15"	21.75"	SIDE
198100	285200	7,000 LBS	10"	10"	18.5"	TOP
198150	285400	7,000 LBS	10"	10"	17"	SIDE
198200	285600	7,000 LBS	15"	15"	20"	TOP
198250	285800	7,000 LBS	15"	15"	22"	SIDE



190706



195362



178101

Square Tube Jack

190706	285910	7,000 LBS*	15"	12.16"	22.41"	TOP
195356	283830	5,000 LBS**	15"	15.1"	22.1"	SIDE
195362	283835	5,000 LBS**	15"	15.1"	22.1"	SIDE
195306	283840	5,000 LBS**	15"	15.2"	22.2"	TOP
195312	283845	5,000 LBS**	15"	15.2"	22.2"	TOP

* 7,000 lb. static, 5,000 lb. lift
** 5,000 lb. static, 3,000 lb. lift

JACKS,
COUPLERS &
WINCHES

Snap Ring and Bolt-Thru Swivel Jacks

Snap Ring Jacks swing either direction to a position parallel with the tongue. The spring loaded single-lock pin secures the jack in an up or down position. The #80302 and #87535 have a wheel attached for easy movement of the trailer when not connected to the tow vehicle. **The Swivel Mount Brackets that attach to the trailer are sold separately on page F-19.**



Part No.	Ref. No.	Capacity	Lift	Bracket Height	Retracted Height	Type of Wind	Type of Foot
87535	269600	500 LBS	10"	12.75"	22.25"	SIDE	WHEEL
80302	269400	500 LBS	8"	13"	19"	TOP	WHEEL
80273	269800	1,000 LBS	10"	11.5"	15"	TOP	SAND
80294	270200	1,000 LBS	15"	15"	21"	TOP	SAND
80452	270000	2,000 LBS	10"	11.5"	15"	TOP	SAND



80273



87535

Fulton® marine jacks are zinc plated, equipped with a comfort grip handle, and have a reinforced poly wheel that is replaceable. All mounting hardware is included with either the bolt-on or weld-on version. Bolt-on models fit trailer tongues up to 3" x 5". Part #XP10 is a bolt-thru swivel, and the TJ series jacks are snap ring swivels.



Part No.	Ref. No.	Capacity	Lift	Bracket Type	Bracket Height	Retracted Height	Type of Wind	Type of Foot
TJ503	267280	800 LBS	10"	BOLT-ON	12.75"	23.25"	SIDE	WHEEL
TJ507	267282	800 LBS	10"	WELD-ON	12.75"	23.25"	SIDE	WHEEL
TJ1055	267285	1,000 LBS	10"	BOLT-ON	12.75"	23.25"	SIDE	WHEEL
XP10	276281	1,000 LBS	10"	BOLT-ON	12.75"	23.25"	SIDE	WHEEL



TJ503

Snap Ring and Bolt-Thru Swivel Jacks



BULLDOG[®] Snap Ring Jacks come complete with a weld-on bracket. Each jack has a painted outer tube and zinc inner tube.

Part No.	Ref. No.	Capacity	Lift	Bracket Height	Retracted Height	Type of Wind	Type of Foot	Bracket Type
151401	282400	2,000 LBS	10"	11.25"	18.5"	TOP	SAND	WELD-ON
151101	282600	2,000 LBS	10"	11.25"	17.5"	SIDE	SAND	WELD-ON
151421	282425	2,000 LBS	15"	14.5"	27.75"	TOP	SAND	WELD-ON
171401	283800	5,000 LBS	10"	11.25"	18.5"	TOP	SAND	WELD-ON
171412	283825	5,000 LBS	15"	14.5"	27.75"	TOP	SAND	WELD-ON



5874A8

Shelby's swivel jack is a Bolt-Thru design (called OSD) with the jack tube offset from the bolt to allow easier access for mounting. Also engineered with a 6° camber to keep the jack centered under the tongue. Zinc coated with "supersealer" for added corrosion resistance. Fits 3" to 5" tongues. Includes mounting bracket. The new "Diamond Series" wheel provides added durability to the advanced engineering design of the OSD jack family.

Part No.	Ref. No.	Capacity	Lift	Bracket Type	Bracket Height	Retracted Height	Type of Wind	Type of Foot
5854	263001	1,000 lbs	10"	BOLT-ON	14.5"	22.75"	SIDE	6" WHL
5856	263099	1,000 lbs	10"	WELD-ON	14.5"	22.75"	SIDE	6" WHL
5874A8	263020	1,500 lbs	10"	BOLT-ON	16.5"	24.75"	SIDE	8" WHL
5876A8	263034	1,500 lbs	10"	WELD-ON	16.5"	24.75"	SIDE	8" WHL

JACKS,
COUPLERS &
WINCHES



The Redline replacement jack features a zinc plated finish for corrosion resistance and easy bolt-on design. The swivel jack is boxed for convenience and showroom display. Poly caster and mounting brackets included.

Part No.	Ref. No.	Capacity	Lift	Bracket Type	Bracket Height	Retracted Height	Type of Wind	Type of Foot
JP01-010	264210	850 lbs	9 3/8"	BOLT-ON	15 3/8"	23"	SIDE	WHEEL


Fulton Kickstand Jack



Fulton kickstand jacks are quick and easy to use due to a lightweight, streamlined design, and snap ring swivel. Ideal for personal watercraft and snowmobile trailers. Zinc plated to resist corrosion.

Part No.	Ref. No.	Capacity	Bracket Type	Ground Clearance	Type of Foot
119244	282305	300 LBS	BOLT-ON	9"	WHEEL

Bulldog Rack Posts and Gearboxes

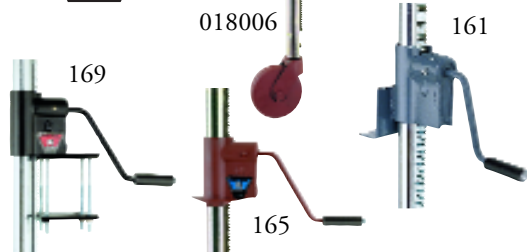

Bulldog's ever-popular Rack Jacks are available in many mounting and foot options. Choose the gearbox and rack post best suited for your particular need.

Part No.	Ref. No.	Description	Type	Capacity
161	280800	GEAR BOX	WELD-ON "L"	750 LB
165	281200	GEAR BOX	A-FRAME	750 LB
167	281400	GEAR BOX	WELD-ON PIPE	750 LB
169	281600	GEAR BOX	BOLT-ON	750 LB
018006	281800	RACK POST	STEEL WHEEL	750 LB
018007	282000	RACK POST	POLY WHEEL	750 LB
018520	282200	RACK POST	SAND FOOT	750 LB